

FC-ST Simplex Metal Hybrid Adapter


(Female to Female)

Description

This Adapter was different from ordinary adapter,the utility model is mainly used for connecting two ends with different inserting core diameters.

Features

- Precision connection with sleeve
- SM and MM connector can be used interchangeably
- Low insertion lose, High echo lose
- Good interchangeability and reliability
- Meet IEC and ROHS standards
- High precision of mechanical dimensions Accuracy

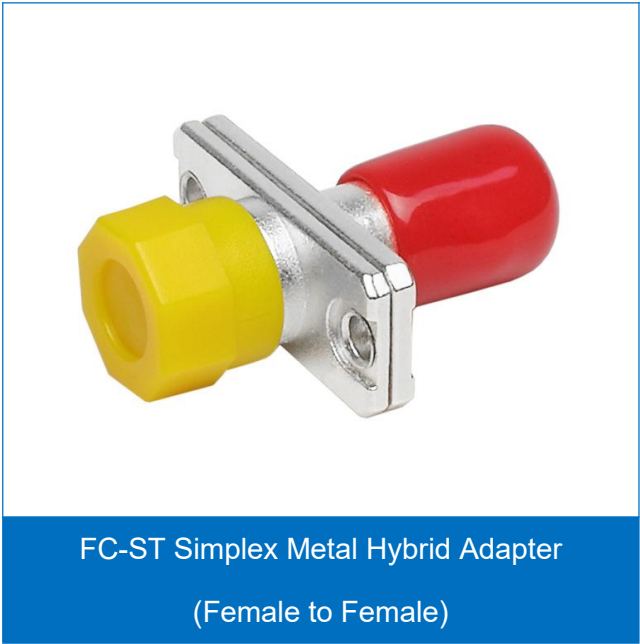

Application

- Telecom network
- CATV
- FTTX

Parameter

| Product                        | FC-ST Simplex Metal Hybrid Adapter<br>(Female to Female) |
|--------------------------------|----------------------------------------------------------|
| Insertion Loss(dB)             | ≤ 0.30                                                   |
| Repeatability(dB)              | ≤ 0.30                                                   |
| Interchangeability(dB)         | ≤ 0.30                                                   |
| Operating Temperature Range(℃) | -40℃～+75℃                                                |
| Storage Temp Range(℃)          | -40℃～+75℃                                                |
| Casing Material                | Zirconium dioxide ceramics                               |