

PD LC-LC Duplex Outdoor Waterproof Patch Cord

Description

The PD LC outdoor waterproof patch cord adopts a waterproof shell to meet the requirements of IP67 environmental sealing.

The TAKFLY outdoor FTTA jumper is specially designed for harsh environments.

Features


- Standard duplexlc connector, well connected with standard lc adaptor
- Available single mode and multimode
- IP67 protection, salt-mist proof, humidity proof, dust proof
- Broad temperature range and wide range of indoor and outdoor cables
- Easy operation, reliable and cost-effective installation specifications




Application

- CATV
- Telecommunication networks
- Active device termination
- Local area networks(LANS)
- Data processing networks
- Test equipment
- Wide area networks(WANS)

PD LC Connector

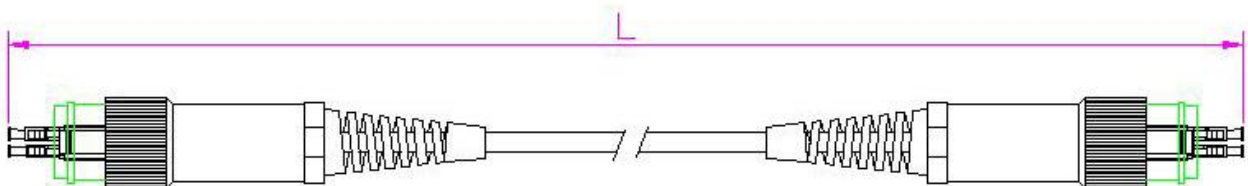

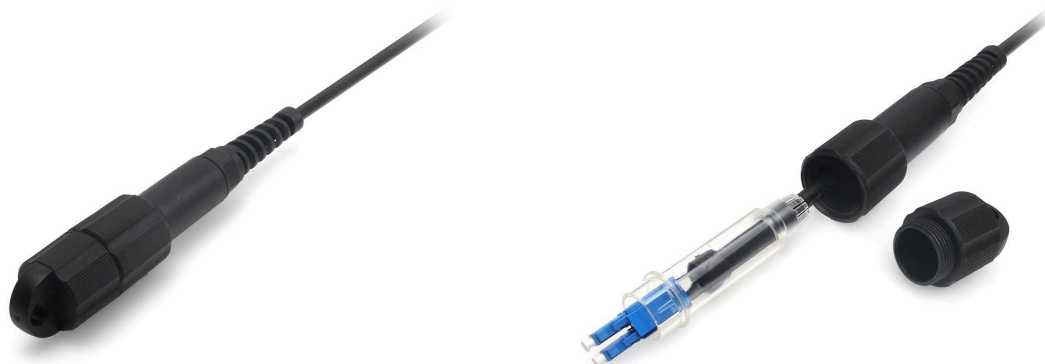

Specifications

End face type	PC、UPC and APC
Fiber type	SM (G652、G655、G657); MM (OM1-OM5)
Cable Diameter	4.5~8.0mm
Insertion loss	≤ 0.3 dB
Return loss	UPC SM ≥ 50dB 、 APC SM ≥ 60 dB 、 PC MM ≥ 35dB
Repeatability	≤ 0.1
Durability	≤ 0.2dB
Interchangeability	≤ 0.2dB
Tensile strength	>70N
Operating Temperature	-20℃~70℃
Storage Temperature	-40℃~80℃
Outer Sheath Material	PVC、LSZH、PU
Bending radius (Static/Dynamic)	10D/20D
Length	Customized