

FTTH Fiber Optic Wall Outlets Terminal Box

Description

This box is a compact fiber terminal for use at the final fiber termination point in the customer premises. It provides mechanical protection and managed fiber control in an attractive format suitable for use inside customer premises, A variety of possible fiber termination techniques are accommodated.



Model No.:TKS-1806-02W


Application

- Telecommunication subscriber loop
- Fiber to the home(FTTH)
- LAN/WAN

Features

- ◆ Nice shape and structure
- ◆ Splicing to factory-terminated pigtails
- ◆ Protects and manages cable effectively
- ◆ Standard size, light weight
- ◆ High quality material
- ◆ Can be wall mounted

Dimension: 115*86*23 (mm)

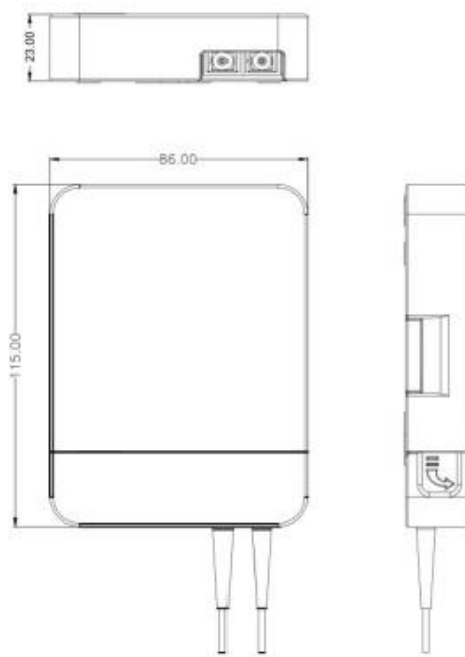

Parameter

Parameter	FTTH Fiber Optic Wall Outlets Terminal Box	
Model No.	TKS-1806-02W	
Outside Dimension (mm)	115*86*23 mm	
Material	Plastic	
Color	White + Transparent	
Splice Method	Fusion Splice (45mm sleeve)	
Adapter count	1*SC	1*LC
Adaptor type	Duplex	Quad
Output	2fiber	4fiber
Application	3.0x2.0mm drop cable or 2.0-6.0mm circular cable	
Fiber diameter	125μm	
Tight cladding diameter	250μm & 900μm	
Insertion loss	≤0.3dB	
Mode of application	Single-mode	
Tensile strength	>50 N	
End-use temperature	-40~+85℃	
Accessories		
No.	Type	
1	Fiber splice protection sleeve	
2	Expansion bolts for the outlet wall-mounted	
3	Self-lock nylon tie	